




**ULTIMATE WATER JETTING SOLUTION**

***C-2070/26D C-2500/25D***

**Diesel Powered  
Ultra High Pressure Water-Blasters**

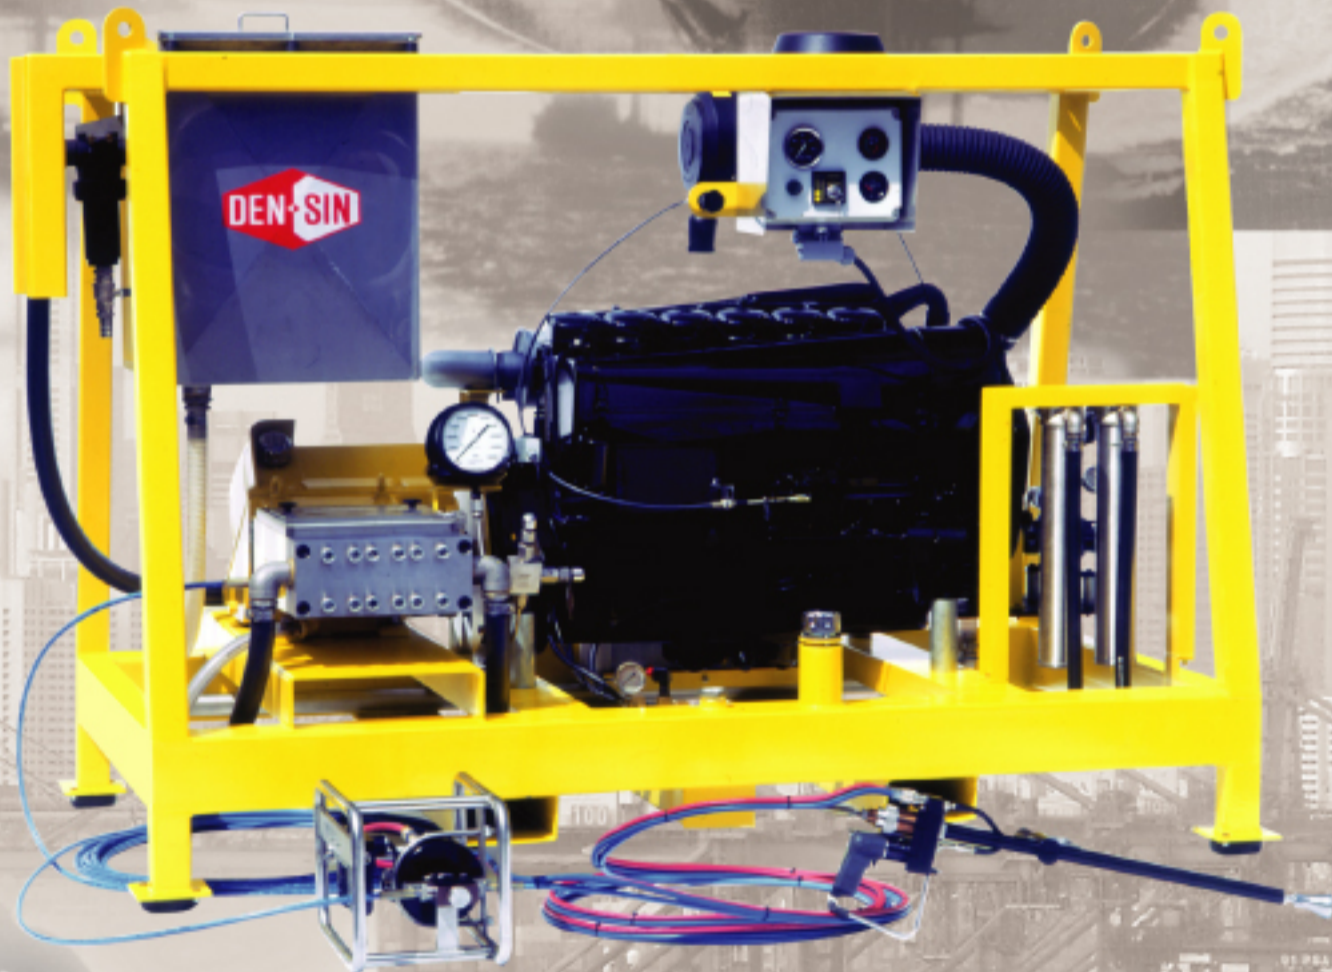


[www.densin.com](http://www.densin.com)

# C-2070/26D C-2500/25D

## Diesel Powered Ultra High Pressure Water-Blasters

The series of Diesel driven Ultra High Pressure Water-Blasters is the ultimate tool for surface preparation. Surface standard of WJ-1 is easily achieved through pure ultra high pressure water-jetting.

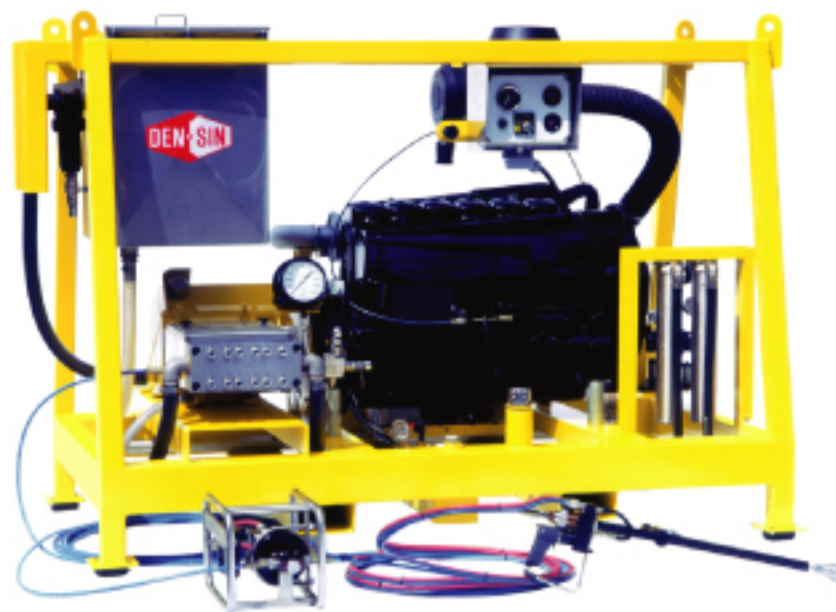

### INDUSTRIES/SEGMENTS

- Cleaning contractor.
- Manufacturing.
- Building and construction.
- Marine.

### APPLICATION AREA

- Removing of paint, graffiti and rust on steel and concrete surfaces.
- Roughening and removing of concrete surfaces.
- Removing of algae/marine grows.

### FEATURES

- Non corrosive materials are used in pump, fittings & pipes.
- Triplex pump with carbide plungers.
- "Floating" plunger system with water cooling.
- In-line valves.
- Built-in gearbox.
- Extremely service friendly pump design.
- Rupture disc protecting against over-pressurization.
- Automatic engine shut-down system.
- Throttle control with vernier adjustment.
- Control panel with oil-pressure, temperature, hour meter and RPM gauges.

- 250L stainless steel water break tank with inlet filter.
- Low water level and pressure cut-off system.
- Two step water filtration system with booster feed pump.
- Built-in fuel tank with level indicator.
- Hot-dip galvanized frame with lifting eyes and forklift pockets.

### STANDARD ACCESSORIES

- 20m 1D 8mm high pressure hose, c/w. 9/16" connections.
- 7m 1D 5mm high pressure hose c/w. 9/16" - 3/8" connections.
- Pneumatically operated unloader dump valve.
- Pneumatically operated rotating gun with 4 nozzles.

### OPTIONAL ACCESSORIES

- Pneumatically operated unloader dump valves for multi gun operation.
- Various nozzle carriers for different nozzle configurations.
- Trolley mounted gun for horizontal surfaces. (floor cleaner)

**Note:**  
Other accessories & attachments are available upon request.

Technical Data:		C-2070/26D	C-2500/25D
Pressure	bar / psi	2070 / 30000	2500 / 36000
Flow:	L/min / USgpm	26.0 / 6.8	25.0 / 6.6
Power consumption:	Kw / Hp	90.0 / 120.0	113.0 / 150.0
Engine:		Deutz 6 Cyl. Turbo Charged Air Cooled Diesel	Deutz 6 Cyl. Turbo Charged w. Intercooler Air Cooled Diesel
Engine speed:	Rpm	1800	1800
Pump speed:	Rpm	510	510
High pressure hose:	m	20 + 7	20 + 7
Fuel tank capacity:	L	140	140
Weight:	kg	1800	1950
Dimensions LxWxH	mm	2600x1450x1800	2600x1450x1800