




ULTIMATE WATER JETTING SOLUTION

C-110ES C-170ES C-200ES

**Electric Powered Heavy Duty
Cold Water High Pressure Cleaners**

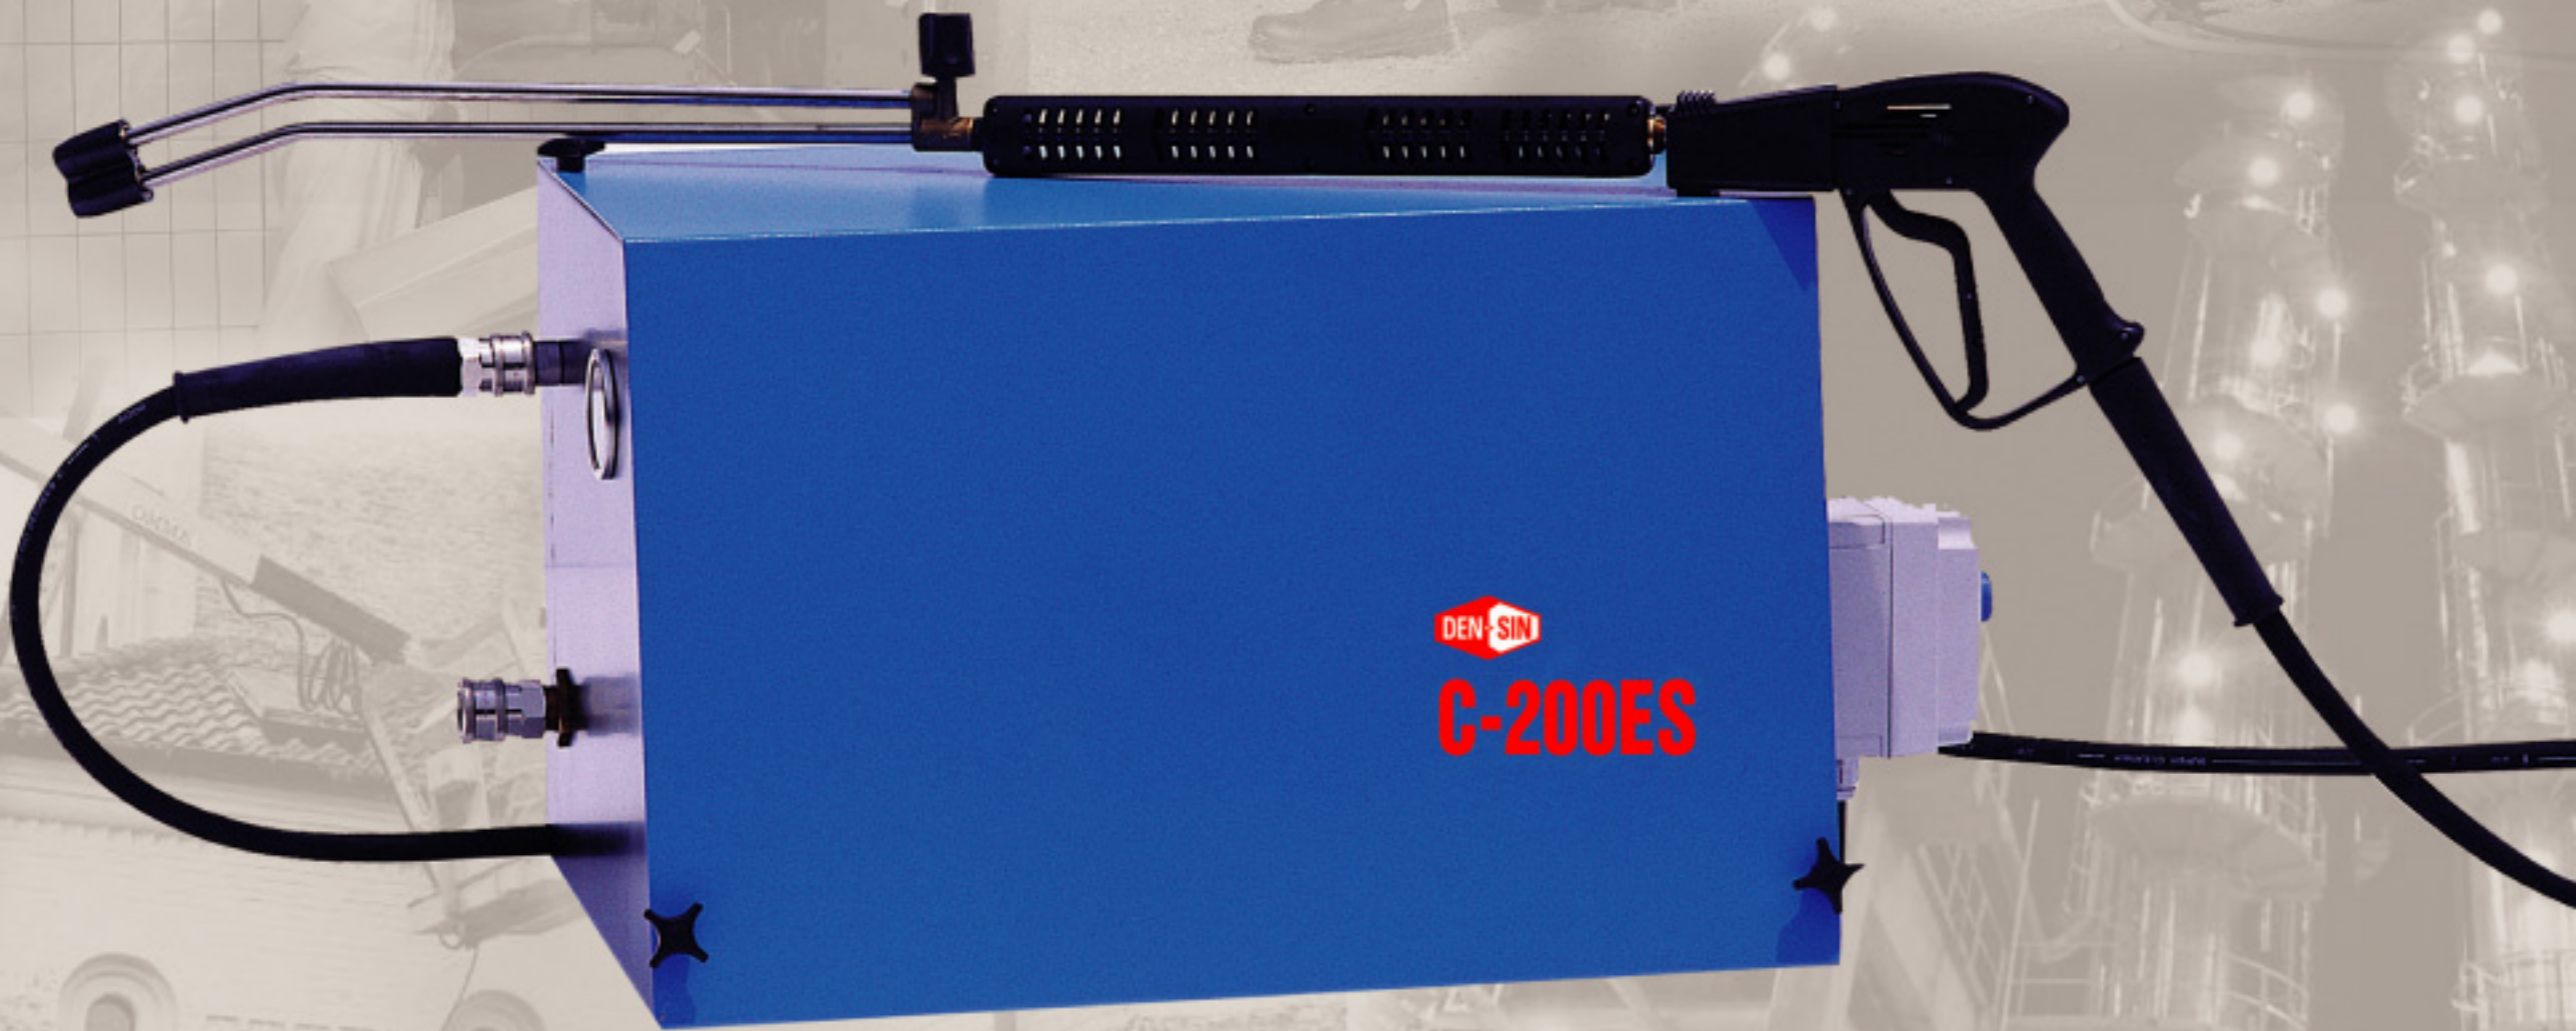


www.densin.com

C-110ES C-170ES C-200ES

Electric Powered Heavy Duty Cold Water High Pressure Cleaners

The series of stationary high-pressure cleaners with powerful performance are ideal for installations where space is precious.

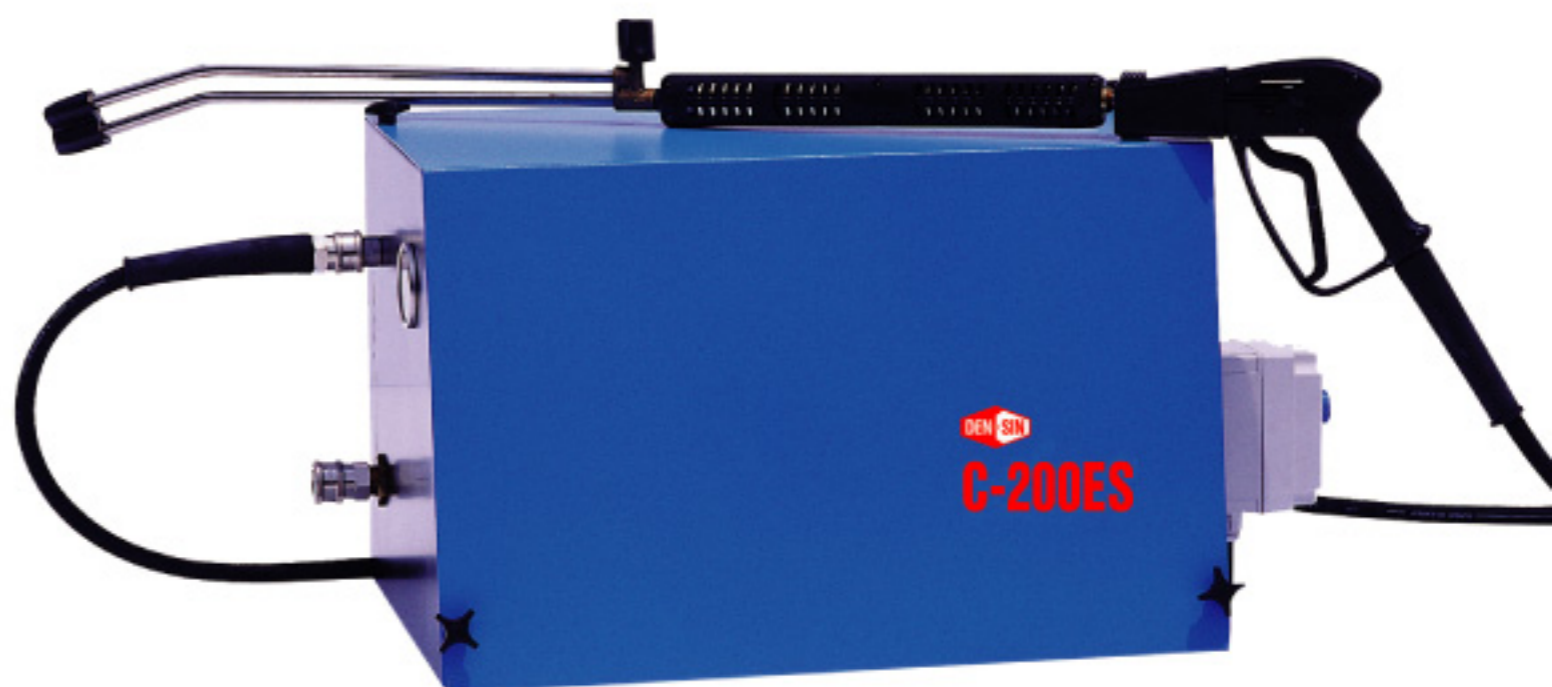

INDUSTRIES/SEGMENTS

- Food processing industry.
- Manufacturing.
- Workshops.
- Gasoline stations.

APPLICATION AREA

- The stationary series of high-pressure cleaners are used for general purpose cleaning of machinery, vehicles, tools etc. It easily removes stubborn dirt, stains and other debris.

FEATURES

- Low speed motor/pump unit.
- Non corrosive materials are used in pump, fittings and pipes.
- 3 fully ceramic pistons.
- Long life seals.
- Stainless steel valves.
- Built-in by-pass/safety-valve.
- Class F motor with overload relay.
- Inlet/outlet quick couplings.

BENEFITS

- Easy access for service and maintenance.
- High durability due to low speed motor/pump unit.
- Easy wall mounting due to the compact dimensions.

STANDARD ACCESSORIES

- Double barrel lance with pressure regulator.
- Trigger gun and lance with quick coupling connection.

OPTIONAL ACCESSORIES

CHEMICAL INJECTOR

- Injection of soap or degreaser for dissolving oil, grease and other dirt deposits.

FOAM LANCE

- For applying chemicals as foam.
- The foam lance allows the chemicals to stick to vertical surfaces, enhancing the working time of the additives.

CONTRACTOR LANCE

- Gives the operator more flexibility and reduces wear on the machine.

WET SAND BLASTING EQUIPMENT

- Ideal for removing paint and rust from steel and concrete surfaces.
- Removal of graffiti.
- Dust free sand blasting.

DRAIN/PIPE CLEANING ATTACHMENT

- Unclogging blocked drains and pipes.

HOSE REEL

- Retractable hose reel with 20m high-pressure hose.

Note:

Other accessories & attachments are available upon request.

Technical Data:		C-110ES*	C-170ES**	C-200ES
Pressure	bar / psi	110 / 1600	170 / 2465	200 / 2900
Flow:	L/min / USgpm	11.7 / 3.1	15.2 / 4.0	16.5 / 4.4
Power consumption:	Kw / Hp	2.2 / 3.0	4.4 / 6.0	5.5 / 7.5
Power supply:	V	220-240/1ph 50Hz 110/1ph 60Hz 220/1ph 60Hz	380-415/3ph 50Hz 220/3ph 60Hz 440/3ph 60Hz	380-415/3ph 50Hz 220/3ph 60Hz 440/3ph 60Hz
Motor spec.:	Rpm 50/60Hz	1400 / 1750	1400 / 1750	1400 / 1750
EI-cable, Oil resistant	m	8	8	8
High pressure hose 3/8":	m	8	8	8
Water inlet temp. Max:	°C	60	60	60
Weight:	kg	50	52	60
Dimensions LxWxH	mm	750x400x400	750x400x400	750x400x400

*) C-110ES 1ph 50/60Hz comes equipped with accumulator for easy start-up.

**) On 60 Hz the C-170ES will have increased flow and reduced pressure to 150 bar.

Notice: Auto Start/Stop is available as an option.